


金具タイプ No. 6F

SAEハイプレッシャー(6000)フランジ

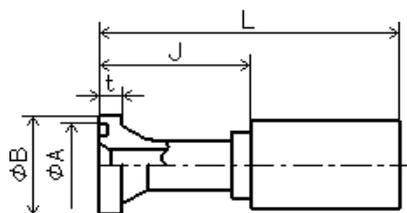

| ホース | ヘッド サイズ | 品名 | 適応範囲 | | | | | | ΦB | ΦA | t | J | L | CL |
|-----|---------|----------------|------|----|-----|-----|-----|-----|------|-------|------|-----|-------|-------|
| | | | 35 | 70 | 140 | 210 | 280 | 350 | | | | | | |
| 32 | 20 | NXI-6F-2020 | ○ | ○ | | | | | 54 | 44.51 | 10.3 | 68 | 110.0 | 74.0 |
| | 16 | NXI-6F-212016 | | | ○ | ○ | ○ | | 47.6 | 39.68 | 9.5 | 65 | 133.0 | 76.0 |
| | 20 | NXI-6F-212020 | | | ○ | ○ | ○ | | 54 | 44.51 | 10.3 | 71 | 139.0 | 82.0 |
| | 24 | NXI-6F-212024 | | | ○ | ○ | ○ | | 63.5 | 53.84 | 12.6 | 50 | 118.0 | 61.0 |
| | 16 | NXGI-6F-602016 | | | | | | ○ | 47.6 | 39.68 | 9.5 | 65 | 155.5 | 76.5 |
| | 20 | NXGI-6F-602020 | | | | | | ○ | 54 | 44.51 | 10.3 | 71 | 161.5 | 82.5 |
| | 24 | NXGI-6F-602024 | | | | | | ○ | 63.5 | 53.84 | 12.6 | 50 | 140.5 | 61.5 |
| 38 | 20 | NXI-6F-2420 | ○ | ○ | | | | | 54.0 | 44.51 | 10.3 | 70 | 119.0 | 76.0 |
| | 24 | NXI-6F-2424 | ○ | ○ | | | | | 63.5 | 53.84 | 12.6 | 70 | 119.0 | 76.0 |
| | 20 | NXI-6F-402420 | | | ○ | ○ | | | 54.0 | 44.51 | 10.3 | 87 | 165.4 | 99.4 |
| | 24 | NXI-6F-402424 | | | ○ | ○ | | | 63.5 | 53.84 | 12.6 | 87 | 165.4 | 99.4 |
| | 20 | NXI-6F-602420 | | | | | ○ | ○ | 54.0 | 44.51 | 10.3 | 87 | 185.0 | 102.0 |
| | 24 | NXI-6F-602424 | | | | | ○ | ○ | 63.5 | 53.84 | 12.6 | 73 | 171.0 | 88.0 |
| | 32 | NXI-6F-602432 | | | | | ○ | ○ | 79.4 | 63.37 | 12.6 | 100 | 198 | 115.0 |
| 50 | 32 | NXI-6F-3232 | ○ | ○ | | | | | 79.4 | 63.37 | 12.6 | 87 | 141.0 | 93.0 |
| | 32 | NXI-6F-213232 | | | ○ | ○ | | | 79.4 | 63.37 | 12.6 | 110 | 202.0 | 123.0 |
| | 32 | HDGI-6F-603232 | | | | | ○ | ○ | 79.4 | 63.37 | 12.6 | 110 | 257.6 | 126.6 |

CL: ホース切断時に差し引く長さ(参考値)