


SAEスタンダード (3000) フランジ xx°ベンド

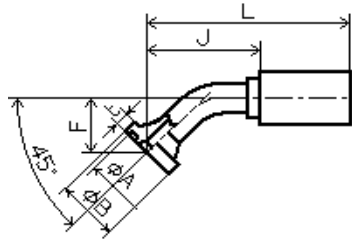

ホース	ヘッド サイズ	ベンド 角度	品名	適応範囲						ΦB	ΦA	t	F	J	L	CL	
				35	70	140	210	280	350								
32	20	60	NX60F-3F-2020 アッペツ	○	○					50.8	44.51	8.0	60.0	107.0	149.0	113.0	
	24	20	NX20F-3F-212024			○	○	○		60.3	53.84	8.0	18.0	107.0	175.0	118.0	
	16	20.3	NX203F-030-212016			○	○	○		44.5	39.68	8.0	30.0	123.0	191.0	134.0	
	24	22.5	NX22.5F-3F-212024			○	○	○		60.3	53.84	8.0	20.7	108.3	176.3	119.3	
	20	30	NX30F-3F-212020			○	○	○		50.8	44.51	8.0	23.5	99.3	167.3	110.3	
	20	60	NX60F-3F-212020			○	○	○		50.8	44.51	8.0	60.0	107.0	175.0	118.0	
	20	65	NX65F-3F-212020			○	○	○		50.8	44.51	8.0	65.2	100.6	168.6	111.6	
	20	70	NX70F-3F-212020			○	○	○		50.8	44.51	8.0	70.0	98.5	166.5	109.5	
	24	70	NX70F-3F-212024			○	○	○		60.3	53.84	8.0	71.7	100.2	168.2	111.2	
	20	15	SHDG15F-3F-602020						○	50.8	44.51	8.0	11.1	131.8	212.3	143.3	
38	24	30	NX30F-3F-2424	○	○					60.3	53.84	8.0	40.0	126.4	175.4	132.4	
	32	30.3	NX303F-060-2432	○	○					71.4	63.37	9.5	60.0	161.0	210.0	167.0	
	24	60	NX60F-3F-2424	○	○					60.3	53.84	8.0	74.0	153.0	202.0	159.0	
	24	22.5	NX22.5F-3F-402424			○	○			60.3	53.84	8.0	22.8	129.1	207.5	141.5	
	24	30	NX30F-3F-402424			○	○			60.3	53.84	8.0	32.0	134.0	212.4	146.4	
	32	30	NX30F-3F-402432			○	○			71.4	63.37	9.5	40.4	153.4	231.8	165.8	
	20	60	NX60F-3F-402420			○	○			50.8	44.51	8.0	55.6	108.3	186.7	120.7	
	24	60	NX60F-3F-402424			○	○			60.3	53.84	8.0	74.0	153.0	231.4	165.4	
	32	65	NX65F-3F-402432			○	○			71.4	63.37	9.5	94.9	151.6	230.0	164.0	
	24	70	NX70F-3F-402424			○	○			60.3	53.84	8.0	87.0	149.8	228.2	162.2	
50	32	15	NX15F-3F-3232	○	○					71.4	63.37	9.5	12.2	124.0	178.0	130.0	
	32	22.5	NX22.5F-3F-3232	○	○					71.4	63.37	9.5	23.2	139.7	193.7	145.7	
	32	65	NX65F-3F-213232			○	○			71.4	63.37	9.5	90.5	150.0	242.0	163.0	

CL : ホース切断時に差し引く長さ (参考値)